



West Bay Sanitary District Code of Safe Practice

FOR IMMEDIATE RELEASE
Initial: June 01, 2012

Questions or comments regarding this
Code of Safe Practice should be directed
to the Regulatory Compliance Coordinator.

Hydraulic Jack


This Code of Safe Practice shall be followed to provide a safe work practice while charging batteries.

SAFETY PRECAUTIONS

WARNING!

Failure to heed the following warnings can result in personal injury and/or equipment damage.

- Read, understand, and follow the manufacturer's operating instructions and the ANSI B30.1 and ASME/ANSI PALD-1 safety standards for jacks.
- Wear eye protection that meets the requirements of ANSI Z87.1 and OSHA.
- Inspect the jack before each use; do not use the jack if it is damaged, altered, or in poor condition.
- To prevent tipping, set up the jack on a hard, level surface.
- The load must not exceed the rated lifting capacity of the jack. Lift only dead weight.
- Center the load on the jack saddle; off-center loads can damage the seals and cause hydraulic failure.
- Use the jack for lifting purposes only. The jack is designed to LIFT loads, not support loads. Immediately support a lifted load with jack stands.
- Use only approved hydraulic fluid, such as Chevron AW Hydraulic Oil MV or equivalent.

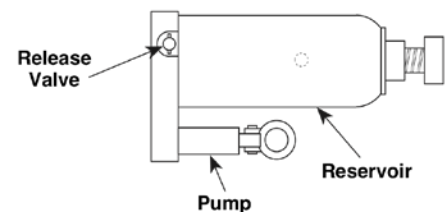

These warnings cannot cover every situation, so have safety foremost in your mind when setting up a job.

PERSONAL PROTECTIVE EQUIPMENT

Protection Area	PPE Required
Eye	Wear safety glasses with side shields or goggles meeting with ANSI Z87.1 Standard.
Face	
Hand	Work gloves.
Head	Hardhat if working under material to be lifted.
Foot	Safety toe shoes or boots.
Body	
Respiratory	
Hearing	