CAPITAL IMPROVEMENT PROJECT – BELLE HAVEN AREA SEWER PROJECT – The Belle Haven Sewer Project area consists of the replacement and rehabilitation of approximately 10,900 linear feet of 6 to 24-inch sanitary sewer mains. Total project estimate $2,900,000.

The project is currently out for bids. The Bid Opening date is March 4, 2015. The Belle Haven area is approximately 10,900 feet of sanitary sewer mains located between Ivy Drive, the Bayshore Freeway, and Willow Road within the City of Menlo Park. The sewer mains have reached its expected life and are in need of repair. The project will involve the replacement and rehabilitation of the sewer mains with the standard open trench method in areas where the pipeline needs replacement with associated surface restoration and a trenchless method using a structural cured-in-place-pipe (CIPP) linear or pipe-bursting in areas where the pipeline can be rehabilitated.

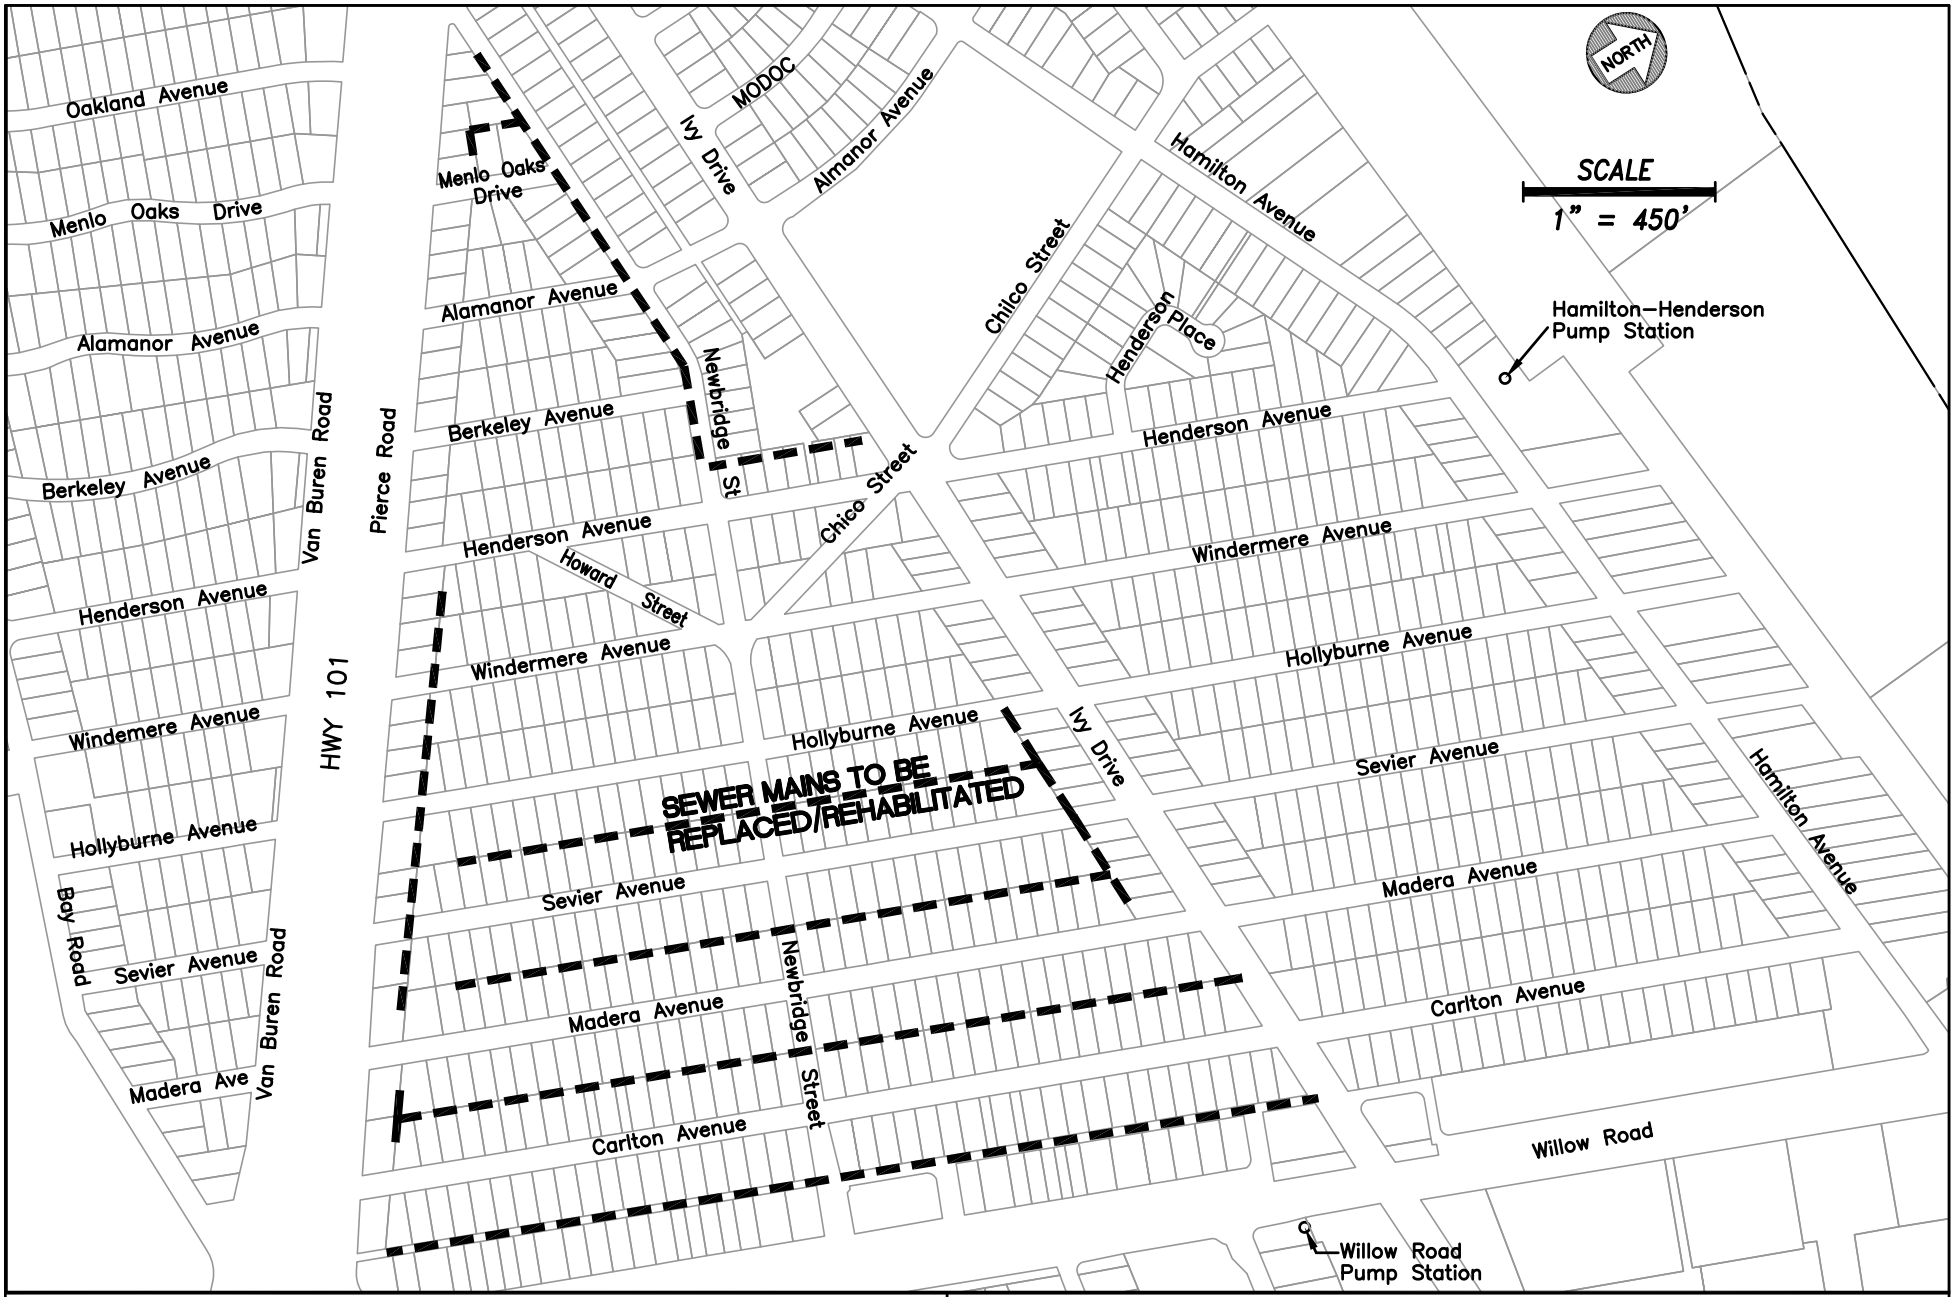

WEST BAY SANITARY DISTRICT

FREYER & LAURETA, INC.
CIVIL ENGINEERS • SURVEYORS • CONSTRUCTION MANAGERS

EXHIBIT 1
BELLE HAVEN SEWER REPLACEMENT PROJECT
MENLO PARK
WEST BAY SANITARY DISTRICT